


SELECTED WORKS & TECHNICAL DOCUMENTATION

MUSKAN *PAREEK*

Interior Architect & Spatial Designer based in Bengaluru. Specializing in high-end residential architecture, bespoke System 32 millwork, and AutoCAD GFC technical documentation.



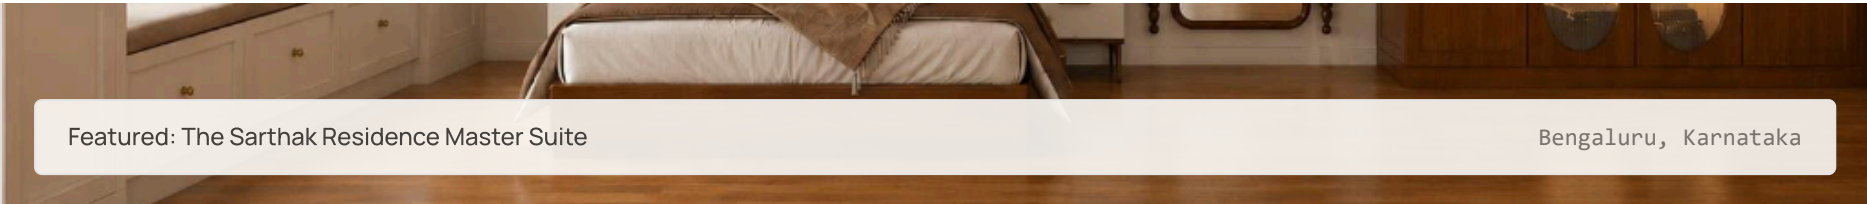

Featured: The Sarthak Residence Master Suite

Bengaluru, Karnataka

DISCIPLINES

Space Planning · System 32 Joinery · 3D Photorealism · GFC Drawings

LOCATION

Bengaluru, Karnataka, India

POINT OF CONTACT

pareekmuskan1999@gmail.com

[linkedin.com/in/muskan-pareek-78b19a224](https://www.linkedin.com/in/muskan-pareek-78b19a224)

Design Philosophy: *Spatial Intention & Millimeter Precision*

Every interior project begins with an unyielding commitment to spatial harmony: choreographing natural daylight, ensuring unobstructed ≥ 900mm circulation spines, and engineering millwork to strict European System 32 tolerances. My practice unifies conceptual warmth with rigorous technical documentation.

01 / ERGONOMICS

Space Planning & Vaastu

Circulation pathways mapped to human scale, natural light axes, and functional utility zones.

02 / MILLWORK

System 32 Engineering

32mm drilling pitch, Blum/Hafele hardware, and 30mm scribing fillers for site masonry variances.

03 / CAD DRAFTING

AutoCAD 2D GFC Sets

1:10 & 1:20 joinery sections, electrical backbox layouts, and plumbing rough-in schematics.


04 / VISUALIZATION

3D Photorealism

Accurate IES photometric light distributions, 2700K Kelvin cove lighting, and 4K material fidelity.

INDEX OF SELECTED CASE STUDIES

01	The Sarthak Residence	3 BHK Apartment	02	Mr. Vivek Residence	3 BHK Modernist Flat
03	Koramangala Villa F	4 BHK Luxury Villa	04	Terracotta Villa (5 BHK)	5 BHK Luxury Villa
05	The Modernist 3BHK	3 BHK Residence	06	Urban Scandi 3BHK	3 BHK Residence
07	The Hitesh & Ria Residence	3 BHK Apartment	08	The Akanchha & Harsh Residence	3 BHK Apartment
09	Ekkat Boutique & Cafe Aroma	Commercial & Cafe	10	System 32 Standards & Materials	Technical Specification



The Sarthak Residence

AREA: 1,850 sq.ft. • TIMELINE: 4.5 Months

A serene 3 BHK sanctuary for Sarthak and his wife, balancing classical Roman arch mouldings, bespoke fluted-glass wardrobes, and an illuminated mandir with hanging brass temple bells.

AUTOCAD 2D BLUEPRINT

1:20 GFC DETAIL



AutoCAD 2D: Architectural Plan & Living TV Wall Elevation

TECHNICAL JOINERY NOTES

- Full 1,850 sq.ft. architectural zoning with ≥ 900 mm clear circulation spine
- Bas-relief slate plaster panel with 2700K perimeter cove halo wash
- System 32 modular wardrobes with 30mm scribing fillers for plumb walls

PHOTOREALISTIC 3D SPATIAL REALITY

4K RENDER VERIFICATION



Photorealistic 3D: Master Suite & Living-Dining Panorama

MATERIAL SPECIFICATIONS


Natural Walnut Veneer

Fluted Reeded Glass

Backlit Alabaster

Brushed Brass

"Balancing spiritual sacredness in the mandir with restful neoclassical bedroom retreats."




Mr. Vivek Residence

AREA: 1,920 sq.ft. • TIMELINE: 4.0 Months

A sophisticated contemporary home featuring an arched backlit TV wall with acoustic timber slats, high-efficiency modular kitchen with smoked glass vitrines, and bespoke cane wardrobe joinery.

AUTOCAD 2D BLUEPRINT

1:20 GFC DETAIL

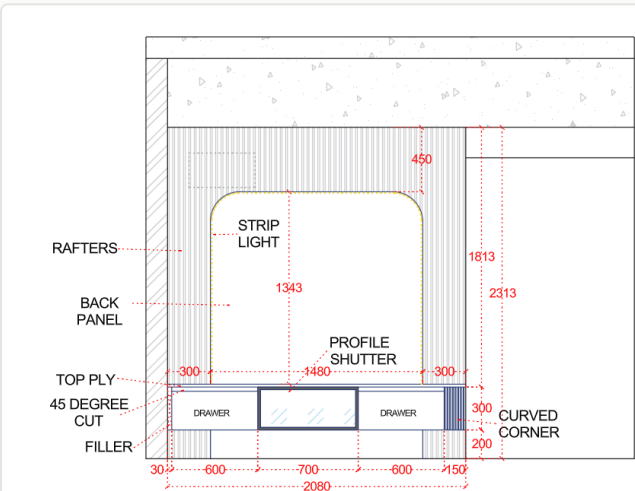

AutoCAD 2D: Living TV Unit Detail (DWG-01, 1:20)

TECHNICAL JOINERY NOTES

- Acoustic oak louvres mounted on 12mm sound-dampening acoustic backing
- Floating drawer console with 45° miter-cut bevel and concealed wire chases
- Modular kitchen with Gola profile hardware and smoked tinted glass vitrines

PHOTOREALISTIC 3D SPATIAL REALITY

4K RENDER VERIFICATION



Photorealistic 3D: Arched TV Wall & Modular Culinary Core

MATERIAL SPECIFICATIONS

Smoked Glass

Acoustic Oak

Charcoal Felt

Gola Profile Quartz

"Every millimeter of joinery serves both acoustic comfort and streamlined visual calm."

Koramangala Villa F


AREA: 5,400 sq.ft. • TIMELINE: 6.0 Months

An expansive luxury residence highlighted by a sunken formal drawing salon, a 10-seater Calacatta Gold dining hall, and an integrated chef's kitchen with metallic bronze splash.

 **AUTOCAD 2D BLUEPRINT**

1:20 GFC DETAIL

GROUND FLOOR FOYER

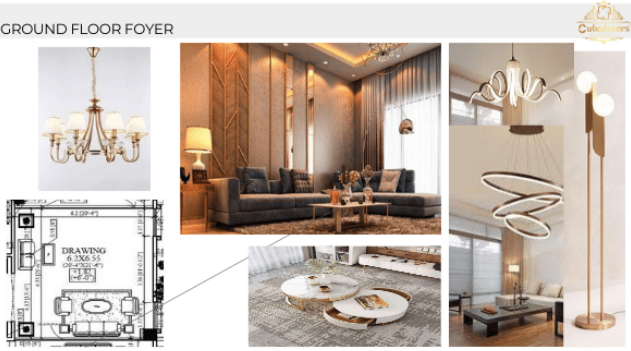

AutoCAD 2D: Sunken Drawing Room & 10-Seater Dining (DWG-D01)

TECHNICAL JOINERY NOTES

- Sunken floor seating perimeter with integrated warm linear LED strip wash
- 8.1-meter dining gallery layout coordinating 10-seater stone dining table
- Chef's kitchen joinery with 320mm chimney duct encasement and appliance tall unit

 **PHOTOREALISTIC 3D SPATIAL REALITY**

4K RENDER VERIFICATION



Photorealistic 3D: Sunken Drawing Salon & Calacatta Dining

MATERIAL SPECIFICATIONS


Calacatta Gold

Chevron Walnut

Champagne PU

Metallic Bronze Tile

"Grand architectural volume tailored with intimate, tactile seating clusters."



Terracotta Villa (5 BHK)

AREA: 4,800 sq.ft. • TIMELINE: 5.5 Months

A classical-contemporary hybrid villa celebrating warm earthen tones, neoclassical boiserie wall mouldings, and a dedicated architectural study lounge with arched backlit coves.

AUTOCAD 2D BLUEPRINT

1:20 GFC DETAIL



AutoCAD 2D: Bespoke Study Unit & Master Bed Wall (DWG-04/05)

TECHNICAL JOINERY NOTES

- Dual-zone culinary architecture: show kitchen island with heavy prep back kitchen
- Backlit translucent quartzite slab (2000×1700mm) framed in fluted walnut
- Ergonomic cantilevered walnut study desk with arched warm LED display alcoves

PHOTOREALISTIC 3D SPATIAL REALITY

4K RENDER VERIFICATION



Photorealistic 3D: Fluted Walnut Bed Wall & Study Lounge

MATERIAL SPECIFICATIONS

Terracotta Plaster

Translucent Quartzite

Satin Walnut

Antique Brass

"Warm earthy tones harmonizing classical architectural mouldings with sleek joinery."

The Modernist 3BHK

AREA: 2,100 sq.ft. • TIMELINE: 4.5 Months

Modernist residence centered around bookmatched marble TV joinery with brass T-inlays, a 45° miter-cut pooja credenza, and a custom athletic basketball bedroom suite.

 AUTOCAD 2D BLUEPRINT

1:20 GFC DETAIL



AutoCAD 2D: Marble TV Wall & 45° Miter Pooja Joinery

TECHNICAL JOINERY NOTES

- Full-height marble slabs with vertical champagne brass T-profile dividing ribs
- 45° miter-cut pooja credenza with Corian counter and beveled bronze mirror
- Bespoke athletic headboard with recessed LED halo wash and acoustic backing

 PHOTOREALISTIC 3D SPATIAL REALITY

4K RENDER VERIFICATION



Photorealistic 3D: Living TV Feature & Modernist Styling

MATERIAL SPECIFICATIONS


Bookmatched Marble

Brass T-Profiles

Corian Solid Surface

Tinted Mirror

"Crisp geometric geometry softened with warm 2700K lighting and natural textures."




Urban Scandi 3BHK

AREA: 1,650 sq.ft. • TIMELINE: 3.5 Months

A luminous Scandinavian apartment featuring an L-shaped modular kitchen with ventilated wicker baskets, bay window cushioned daybed with deep toy drawers, and a beveled mirror foyer.

AUTOCAD 2D BLUEPRINT

1:20 GFC DETAIL

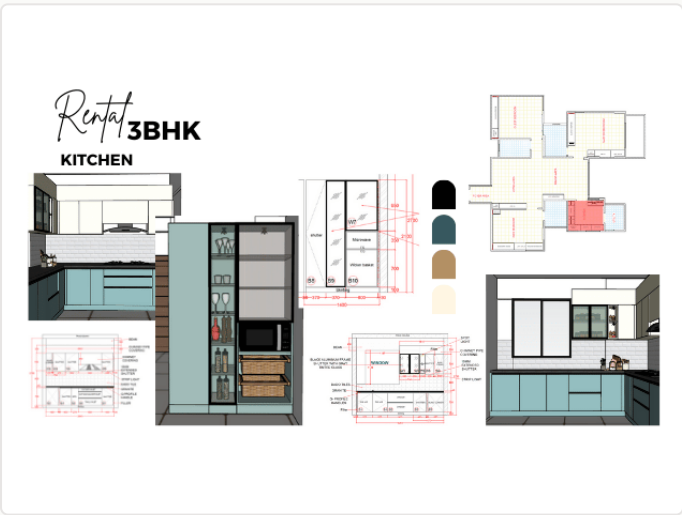

AutoCAD 2D: L-Shaped Kitchen & Bay Daybed Joinery (DWG-K01)

TECHNICAL JOINERY NOTES

- Natural wicker vegetable pull-out baskets integrated into 560mm base carcass
- Cushioned window daybed with heavy-duty tandembox toy drawers below
- Full-height 5-door System 32 wardrobe with 30mm scribing fillers

PHOTOREALISTIC 3D SPATIAL REALITY

4K RENDER VERIFICATION



Photorealistic 3D: Light Oak Kitchen & Living Panorama

MATERIAL SPECIFICATIONS


Blonde Ash Oak

Natural Woven Cane

Sage Green PU

Honed Quartz

"Functional Scandinavian minimalism designed for effortless daily family rituals."



The Hitesh & Ria Residence

AREA: 2,350 sq.ft. • TIMELINE: 4.5 Months

An upscale apartment highlighted by a fluted foyer shoe console with champagne gold trim, an acoustic charcoal living TV wall, and a custom fluted-glass cocktail bar with stemware racks.

1:20 GFC DETAIL




AutoCAD 2D: Foyer Console & Acoustic TV Wall (DWG-01/02)

TECHNICAL JOINERY NOTES

- Shoe credenza with brushed champagne gold trim and slatted acoustic partition
- Acoustic charcoal living wall with concealed wiring conduit and floating console
- Bespoke cocktail bar with bronze fluted glass vitrines and warm LED display

4K RENDER VERIFICATION

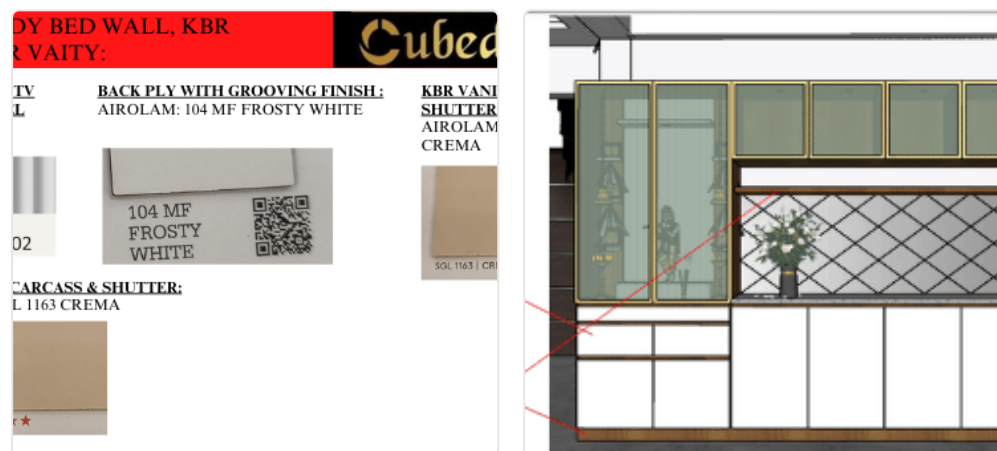

Photorealistic 3D: Acoustic Living Feature & Foyer Console

MATERIAL SPECIFICATIONS


Charcoal Acoustic Battens

Champagne Brass

Smoked Fluted Glass

Travertine

"Dramatic tonal contrast balanced by warm metallic accents and fluted glass transparency."



The Akanchha & Harsh Residence

AREA: 1,980 sq.ft. • TIMELINE: 4.0 Months

A family home tailored with an L-shaped ultra-matte white PU shaker kitchen, light oak System 32 wardrobes, and a custom dual-tier kids bunk bed with integrated study workstation.

AUTOCAD 2D BLUEPRINT

1:20 GFC DETAIL

LAMINATE DETAILS

UNIT	BRAND	LAMINATE	CODE	DOOR FINISHING
TV UNIT & POOJA UNIT				
BASE EPOXY DRAWER FACIA, POOJA TRAY, CARCASS & SHUTTER FRAME	MERINO	BEIGE	21037 MR+	1113 HG
TV TOP, OPEN UNIT, POOJA TRAY & SKIRTING	DORBY VESTA	WARM WHITE	SG 8103	1102 HG
TV BACK PLY	AIROLAM	MARBELLA	SQL 1738	
CROCKERY UNIT				
BASE SHUTTER & WALL UNIT	MERINO	BEIGE	21037 MR+	1113 HG
BASE DRAWERS & WALL OPEN UNIT	DORBY VESTA	WARM WHITE	SG 8103	1102 HG
KITCHEN				
BASE, TALL UNIT, ALUMINUM TALL UNIT & WOODEN BASKET UNIT	AIROLAM		HGL 745	1035 HG
WALL CHIMNEY PIPE COVERING & CHIMNEY COVERING	AIROLAM		HGL 702	1000 HG
UTILITY				
WALL UNIT	AIROLAM		HGL 702	1000 HG
GUEST BEDROOM				
WARDROBE CARCASS, SKIRTING, FLOOR & DRESSER UNIT CARCASS	DORBY VESTA	MARCON	SG 8119	
WARDROBE SHUTTERS	DORBY VESTA	MARCON	SG 8119	1081 HG
WARDROBE LOFT SHUTTERS & DRESSER DRAWER FACIA	DORBY VESTA	VOLCA WHITE	SG 885	1081 HG

AutoCAD 2D: Shaker Kitchen & System 32 Wardrobes (DWG-K01/W01)

TECHNICAL JOINERY NOTES

- Ultra-matte white PU shaker doors with soft-close tandembox drawer systems
- Light oak synchronized laminate sliding wardrobes with silent top-hung tracks
- Dual-tier bunk bed with safety handrails and under-bed rolling toy chests

PHOTOREALISTIC 3D SPATIAL REALITY

4K RENDER VERIFICATION

DETAILS

UNIT	BRAND	LAMINATE	CODE	DOOR FINISHING
TV UNIT & POOJA UNIT				
WALLER FACIA, POOJA TRAY, CARCASS & SHUTTER FRAME	MERINO	BEIGE	21037 MR+	
TV UNIT, POOJA TRAY & SKIRTING	DORBY VESTA	WARM WHITE	SG 8103	
TV BACK PLY	AIROLAM	MARBELLA	SQL 1738	
CROCKERY UNIT				
WALL & WALL UNIT	MERINO	BEIGE	21037 MR+	
WALL OPEN UNIT	DORBY VESTA	WARM WHITE	SG 8103	
KITCHEN				
WALL, ALUMINUM TALL UNIT, BASKET UNIT	AIROLAM		HGL 745	
PIPE COVERING & CHIMNEY COVERING	AIROLAM		HGL 702	
UTILITY				
WALL UNIT	AIROLAM		HGL 702	
GUEST BEDROOM				
CARCASS, SKIRTING, DRESSER UNIT CARCASS	DORBY VESTA	MARCON	SG 8119	
DOOR SHUTTERS	DORBY VESTA	MARCON	SG 8119	SG 885
LOFT SHUTTERS & DRAWER FACIA	DORBY VESTA	VOLCA WHITE	SG 885	

POOJA UNIT : LAMINATE

RAWER A BASE CARCASS & SHUTTER FRAME 7 MR+



TV TOP, OPEN UNIT, POOJA TRAY & SKIRTING DORBY VESTA : SG 8103 WARM WHITE



TV BACK PLY AIROLAM : MARBELLA



TV BACK PLY



Photorealistic 3D: PU Shaker Kitchen & Family Spaces

MATERIAL SPECIFICATIONS


Matte White PU

Synchronized Oak

Calacatta Quartz

Brushed Nickel

"Timeless transitional shaker millwork engineered for durability and tactile elegance."



Commercial Architecture: *Retail & Cafe Environments*


Commercial environments demand a rigorous synthesis of high-traffic ergonomics, resilient material engineering, and immersive brand storytelling. Featuring bespoke service counters, integrated acoustic ceilings, and custom display joinery.

RETAIL FLAGSHIP

1,200 sq.ft. • Commercial

Ekkat Designer Boutique

Bespoke reception counter (DWG RC-002, 1:10 A3) with sage green laminate, 300mm fluted timber feature panel, 750mm desk height, and terracotta micro-cement arched display alcoves.

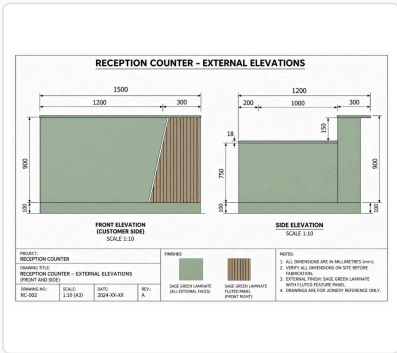

DWG RC-002 (1:10)

Sage Green • Terracotta • Oak

HOSPITALITY CAFE

950 sq.ft. • Specialty Cafe


Cafe Aroma Express

Bespoke fluted blonde oak espresso service bar paired with leathered Absolute Black granite counters, hand-woven cane pendant luminaires, and Scandinavian outdoor terrace banquettes.



DWG CB-01 (1:20)

Fluted Blonde Oak • Absolute Black Granite



System 32 Joinery Specification Matrix

All bespoke millwork designed in my studio is manufactured adhering to the international System 32 cabinetry standard, guaranteeing millimeter-level accuracy and enduring hardware performance.

COMPONENT	STANDARD SPECIFICATION	HARDWARE / MECHANISM	ALLOWANCE / TOLERANCE
Cabinet Carcass	18mm BWP/IS-710 Marine Plywood	Concealed Cam & Dowel Fasteners	±0.5mm drilling pitch
Site Scribing Fillers	30mm Dummy Fillers on all masonry bounds	Matching face laminate / PU	Compensates site out-of-plumb
Hinge Systems	37mm setback, 32mm vertical pitch	Blum Clip Top Blumotion 110°	3-way micro cam adjustment
Drawer Runners	Full-extension soft-close synchronized	Hafele Tandembox Antaro / Blum Movento	40kg–70kg dynamic load rated
Architectural Lighting	2700K 90+ CRI LED strip in aluminum profile	Hafele Loox / Osram Linear	Frosted opal diffuser (no dotting)

LET'S COLLABORATE ON YOUR NEXT RESIDENTIAL OR COMMERCIAL PROJECT

Muskan Pareek

Interior Architect & Spatial Designer · Bengaluru, India

✉ pareekmuskan1999@gmail.com

•

in [linkedin.com/in/muskan-pareek-78b19a224](https://www.linkedin.com/in/muskan-pareek-78b19a224)

•

📍 Bengaluru, Karnataka, India